



Elektrėnų g. 5, Kaunas LT-51193


Tel. 8-37 407434

Mob. 8-610 20740

Fax. 8-37 407435

www.tikneta.lt / info@tikneta.lt

Įtempiklis lynams DIN 1480 L+L - techninės charakteristikos

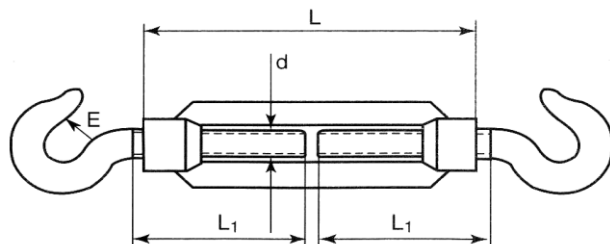

KODAS	MATMUO, mm	L, mm	L1, mm	E, mm	d	SVORIS (VNT.), Kg	DARBINĖ APKROVA, Kg	KRITINĖ APKROVA, Kg
D1480/LL/05070	5	70	35	7	M5	0,0486	50	125
D1480/LL/06110	6	110	55	8,5	M6	0,086	70	175
D1480/LL/08110	8	110	57	10	M8	0,1644	140	350
D1480/LL/10125	10	125	68	13	M10	0,286	220	550
D1480/LL/12125	12	125	70	15	M12	0,4338	310	770
D1480/LL/14140	14	140	75	17	M14	0,6164	450	1120
D1480/LL/16170	16	170	88	20	M16	0,9426	600	1500
D1480/LL/18196	18	200	98	20	M18	1,3964	750	1875
D1480/LL/20200	20	200	105	25	M20	1,6842	910	2270
D1480/LL/22220	22	220	118	25	M22	2,4438	1100	2750
D1480/LL/24255	24	255	135	26,5	M24	3,3034	1300	3250
D1480/LL/28255	28	255	135	33	M27	4,8068	1900	4750
D1480/LL/32295	32	295	148	35,3	M32	6,3782	2200	5500