



Elektrėnų g. 5, Kaunas LT-51193



Tel. 8-37 407434

Mob. 8-610 20740

Fax. 8-37 407435

www.tikneta.lt / info@tikneta.lt

Ankeris GK plokštei - techninės charakteristikos

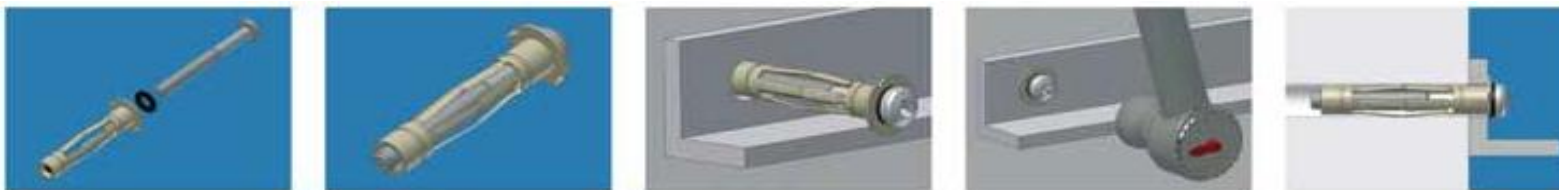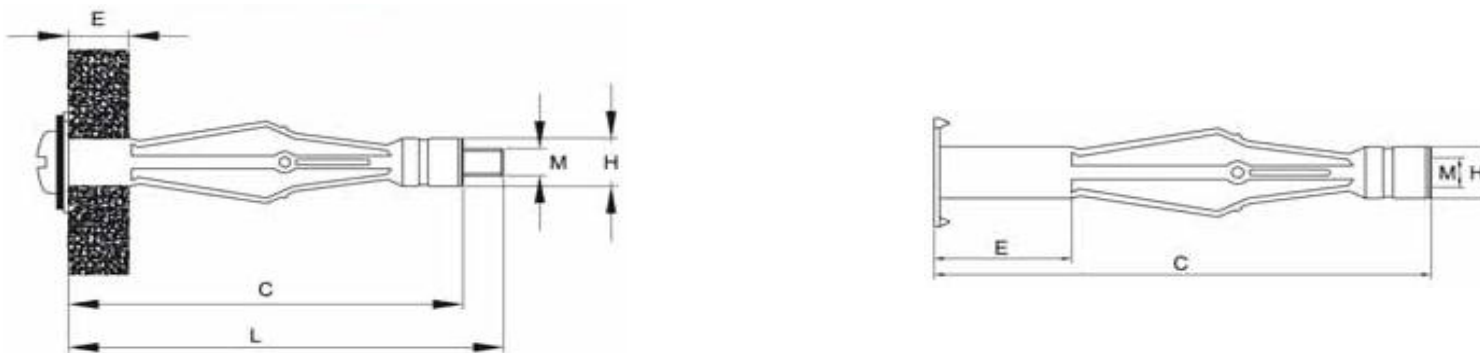

KODAS	MATMUO	GRĄŽTO SKERSMUO, H	VARŽTAS, M	ILGIS, C	VARŽTO ILGIS, L	APKABINAMOS MEDŽIAGOS STORIS, E	MIN. ERTMĖS GYLIS
701/04012A	4x12	8	M-4	33,5	41	3 - 9	39
701/04024A	4x24	8	M-4	39,5	47	8 - 15	46
701/05013A	5x13	10	M-5	37	43,5	5 - 13	46
701/05016A	5x16	10	M-5	53	60	5 - 16	59
701/05032A	5x32	10	M-5	65,5	74	16 - 32	72
701/05045A	5x45	10	M-5	81	89	32 - 45	89
701/06013A	6x13	12	M-6	37	45	5 - 13	46
701/06016A	6x16	12	M-6	53	60	5 - 16	59
701/06032A	6x32	12	M-6	66	74	16 - 32	72

Maksimali išplėšimo jėga tvirtinant į gipskartonį - 20kg.