




Elektrėnų g. 5, Kaunas LT-51193  
 Tel. 8-37 407434  
 Mob. 8-610 20740  
 Fax. 8-37 407435  
 www.tikneta.lt / info@tikneta.lt

### Lyno suspaudiklis DIN741 - techninės charakteristikos

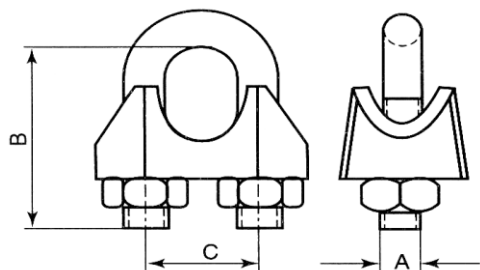

KODAS	MATMUO, mm	A, mm	B, mm	C, mm	SVORIS (VNT.), Kg
D741/03ZN	3	4	16	9	0,0084
D741/05ZN	5	5	19	11	0,0142
D741/06ZN	6	5	23	13	0,0158
D741/08ZN	8	6	28	16	0,0276
D741/10ZN	10	8	35	19	0,0595
D741/11ZN	11	8	37	20	0,0662
D741/12/13ZN	12/13	10	45	24	0,112
D741/14ZN	14	10	46	25	0,1234
D741/16ZN	16	12	51	27	0,1838
D741/19/20ZN	19/20	12	62	32	0,2316
D741/22ZN	22	14	72	37	0,3458
D741/24/26ZN	24/26	14	76	41	0,385
D741/30ZN	30	16	95	48	0,6356
D741/34ZN	34	16	105	54	0,741
D741/40ZN	40	16	125	60	0,934