

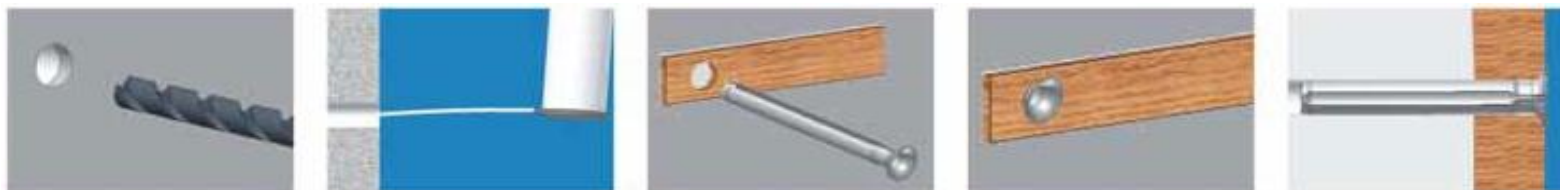


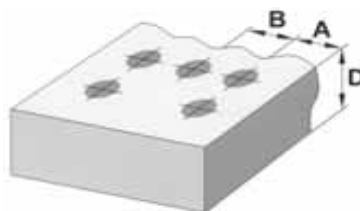

Elektrėnų g. 5, Kaunas LT-51193  
 Tel. 8-37 407434  
 Mob. 8-610 20740  
 Fax. 8-37 407435  
 www.tiknet.lt / info@tiknet.lt

### Spyruoklinis ankeris - techninės charakteristikos

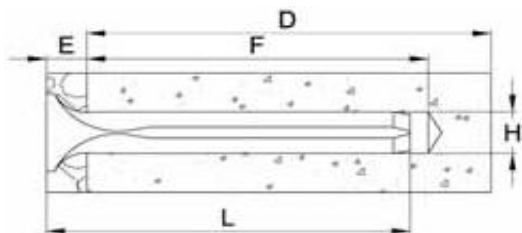

KODAS	MATMUO	GRAŽTO SKERSMUO, H	ANKERIO ILGIS, L	MINIMALUS ĮGRĘŽIMO GYLIS, F	MINIMALUS ANKERIO ĮSISKVERBIMAS	MAX. PAGRINDO STORIS, E	MIN. PAGRINDO STORIS, D	KIRPIMO JĖGA, Kg
79/06030	6x30	6	30	35	27	3	32	55
79/06050	6x50	6	50	40	30	20	35	55
79/06060	6x60	6	60	40	30	30	35	55
79/06080	6x80	6	80	40	30	50	35	55
79/08070	8x70	8	70	50	40	30	45	110
79/08090	8x90	8	90	50	40	50	45	110
79/08110	8x110	8	110	50	40	70	45	110
79/08130	8x130	8	130	50	40	90	45	110
79/08150	8x150	8	150	50	40	110	45	110